




YR-TMB1800

Specifications:

- 12" midbass super loudspeaker
- Heavy duty aluminum sealed basket
- 3.0" high temperture kccaw voice coil
- Max power:1800 watts
- Installation depth: 130mm/5.12"
- Sensitivity: 98.8dB
- Frequency response: 85-12.1khz
- Nominal impedance: 8 ohm
- Progressive cooling system


Tamboreo (SERIES)

SPL vs Freq

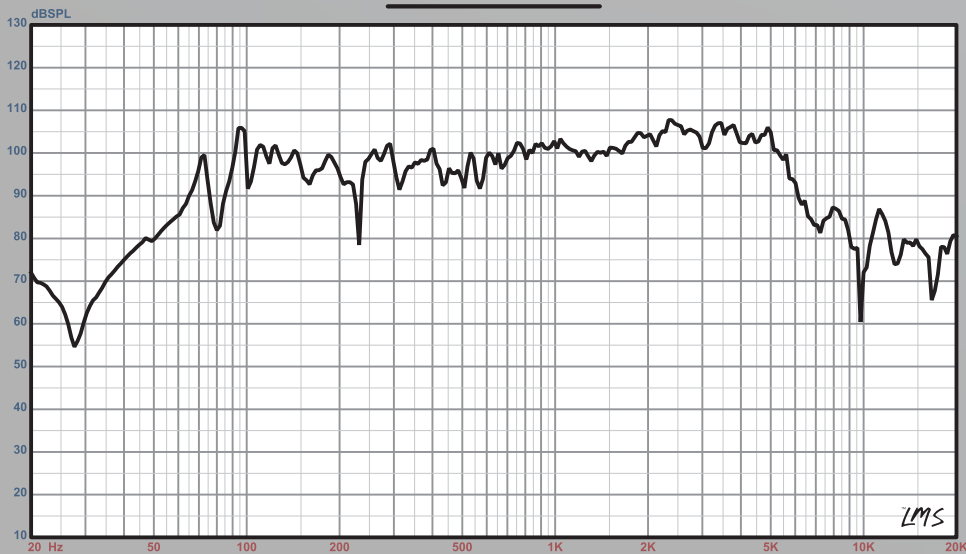

YR-TMB1800

12 MIDBASS SUPER LOUD SPEAKER

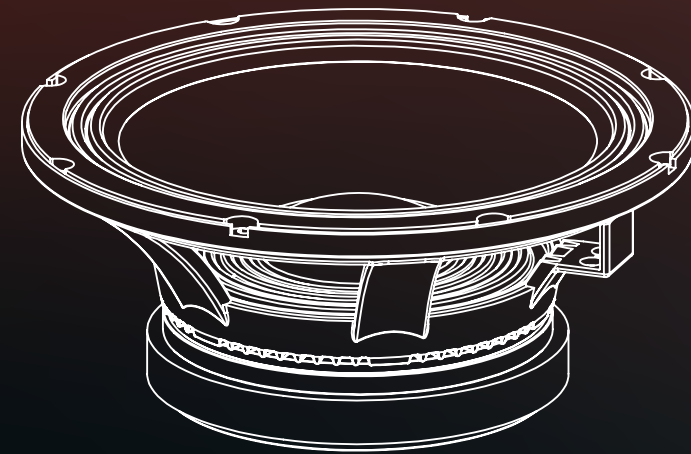

CODE:2750

BOCINA DE 12" DE VOZ TAMBOREO



Let's Rock Roll

PRODUCT MANUAL



YR-TMB1800

12" MIDBASS SUPER LOUD SPEAKER

Specifications:

Nominal Diameter	12"
Nominal Impedance	8 ohms
MAX Power Handling	1800W
RMS Power Handling	900W
Sensitivity (1w/1m)	98.8 dB
Frequency Response	8.5Hz-12.1KHz

Motor:



Voice Coil Diameter	3.0"/76.5mm
Voice Coil Former Material	Glass Fiber
Winding Material	CCAW
Cone Material	Paper
Surround Material	Cloth
Basket Material	Aluminum
Magnet Material	Ferrite
Magnet Weight	112oz

Thiele & Small Parameters:

Equivalent Volume	Vas	18.612L
Excursion	X-max	13.8 mm
Free Air Resonance	Fs	84.8 Hz
Mechanical Factor	Qms	1.524
Electrical Factor	Qes	0.431
Total Factor	Qts	0.329
Dc Resistance	Re	5.2 ohms

Measurements

Overall Diameter	12.56"/319 mm
Front Mount Baffle Cutout	11.42"/290 mm
Mounting Depth	5.12"/130 mm
Overall Depth	5.64"/143 mm
Motor Diameter	7.87"/200mm

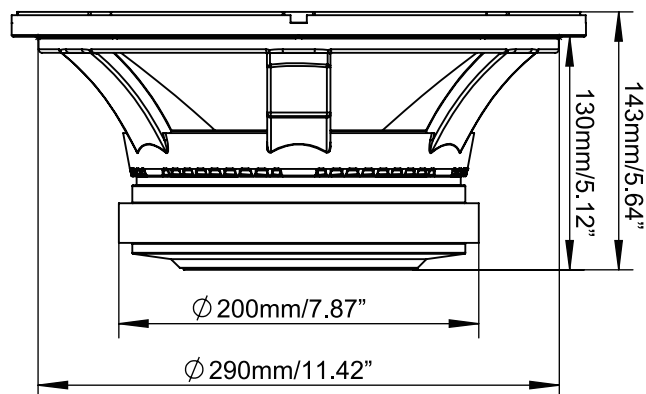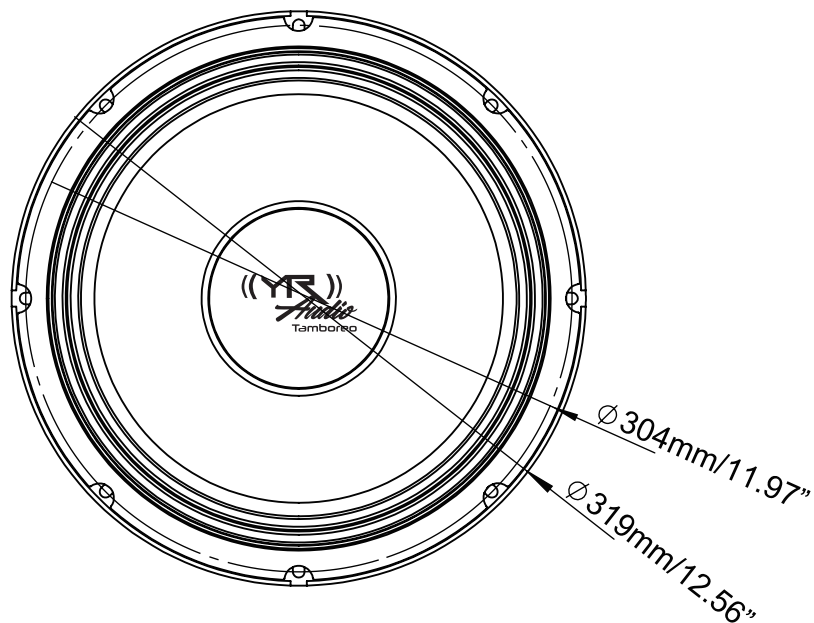

Tamboreo (SERIES)

