



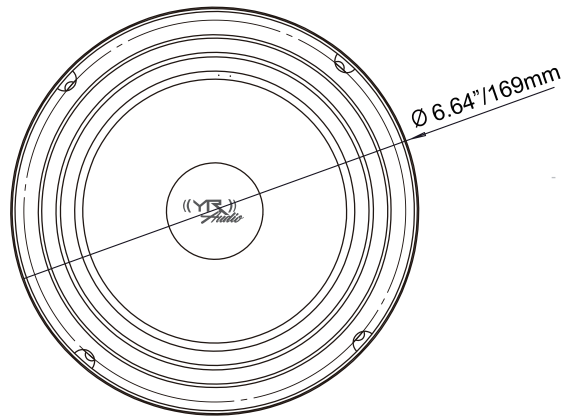

SPL VS FREQ

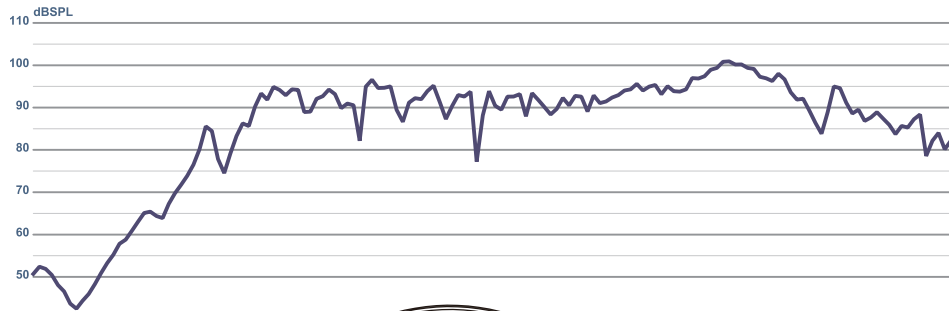

MDA-6008

6.5 Midrange Loud Speaker

Specifications:

Nominal Diameter	6.5
Nominal Impedance	8 ohms
MAX Power Handling	600W
RMS Power Handling	300W
Sensitivity (1w/1m)	93 dB
Frequency Response	93Hz-17KHz

Motor:

Voice Coil Diameter	1.5"/38.6 mm
Voice Coil Former Material	Kapton
Winding Material	CCAW
Cone Material	Paper
Surround Material	Cloth
Basket Material	Steel
Magnet Material	Ferrite
Magnet Weight	33oz

Thiele & Small Parameters:

Equivalent Volume	Vas	2.695L
Excursion	X-max	7.7 mm
Free Air Resonance	Fs	92 Hz
Mechanical Factor	Qms	3.749
Electrical Factor	Qes	1.069
Total Factor	Qts	0.832
Dc Resistance	Re	5.2 ohms

Measurements

Overall Diameter	169/6.64" mm
Front Mount Baffle Cutout	147/5.78" mm
Mounting Depth	66/2.59" mm
Overall Depth	72/2.83" mm

YR AUDIO SERIES



Let's Rock Roll

PRODUCT MANUAL

Designed by YR Audio, And Thank You For Chosen High Quality Level.

