



YR-TMB8000

Specifications:

8" midbass super loudspeaker

Heavy duty aluminum sealed basket

4.0" high temperature kccaw voice coil

Max power: 1200 watts

Installation depth: 95mm/3.74"

Sensitivity: 95.2dB


Frequency response: 147-10.5kHz

Nominal impedance: 8 ohm

Progressive cooling system

Tamboreo (SERIES)


SPL vs Freq

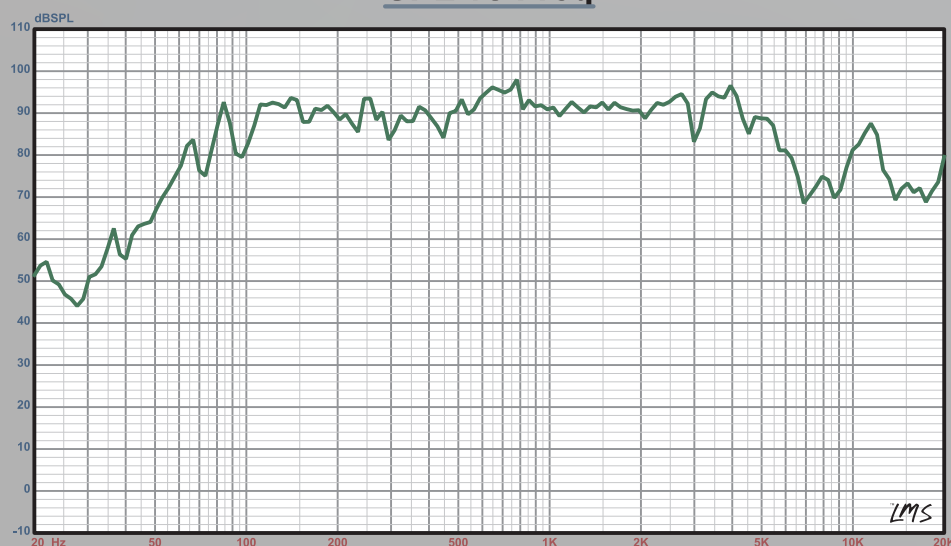

YR-TMB8000

8" MIDBASS SUPER LOUD SPEAKER

BOCINA DE 8" DE VOZ TAMBOREO

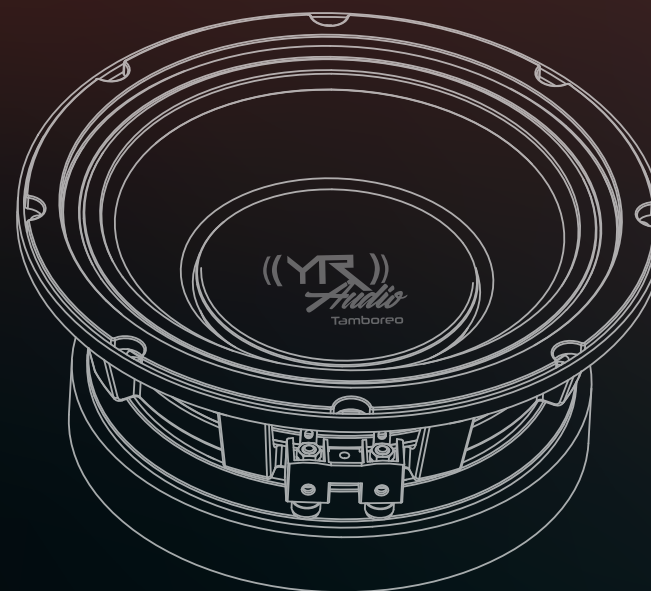

Let's Rock Roll

PRODUCT MANUAL



YR-TMB8000

8" MIDBASS SUPER LOUD SPEAKER

Specifications:

Nominal Diameter	8"
Nominal Impedance	8 ohms
MAX Power Handling	1200W
RMS Power Handling	500W
Sensitivity (1w/1m)	95.2 dB
Frequency Response	147Hz-10.5KHz

Motor:


Voice Coil Diameter	4.0"/95mm
Voice Coil Former Material	Glass Fiber
Winding Material	CCAW
Cone Material	Paper
Surround Material	Cloth
Basket Material	Aluminum
Magnet Material	Ferrite
Magnet Weight	62oz

Thiele & Small Parameters:

Equivalent Volume	Vas	1.956L
Excursion	X-max	10.5 mm
Free Air Resonance	Fs	147 Hz
Mechanical Factor	Qms	2.460
Electrical Factor	Qes	0.836
Total Factor	Qts	0.624
Dc Resistance	Re	5.2 ohms

Measurements

Overall Diameter	8.3"/211 mm
Front Mount Baffle Cutout	17.32"/186 mm
Mounting Depth	3.74"/95 mm
Overall Depth	1.3"/103.3mm
Motor Diameter	6.7"/170mm

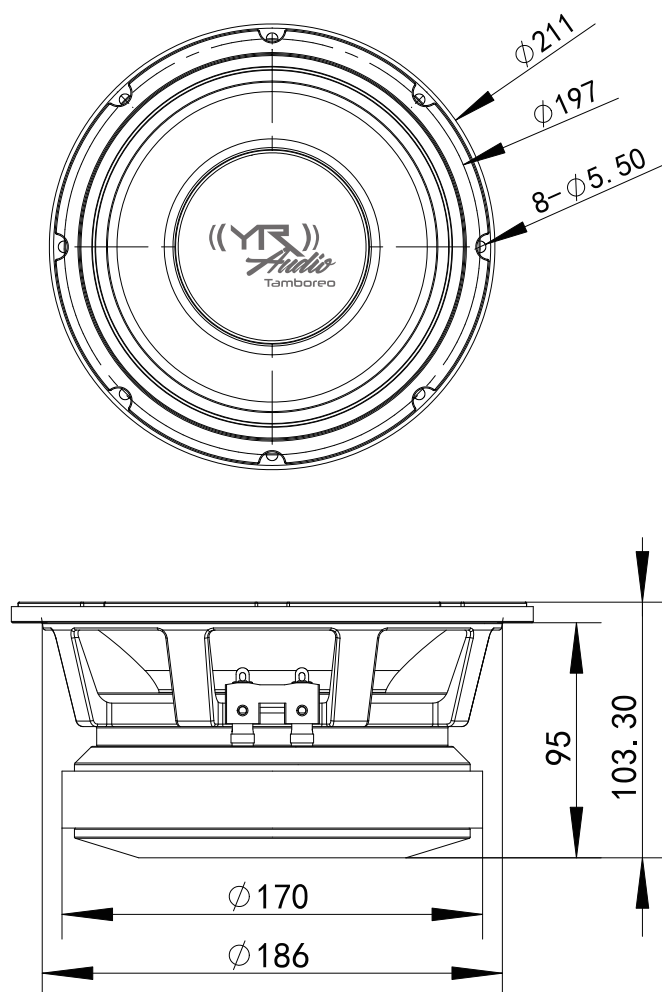

Tamboreo (SERIES)

